

# Nordic Look®



**SYSTEMX IS THE PENULTIMATE FINISH™ FOR PAINTED SURFACES. MADE FROM GLASS FIBER TEXTILES, IT PROVIDES A DECORATIVE, SMOOTH OR TEXTURED FOUNDATION FOR INTERIOR PAINT AND COATINGS ON WALLS & CEILINGS.**



## POWERFULL PROPERTIES



### CLASS A FIRE RATING

Tested in accordance with ASTM E84



### PRE-GLUED / PRE-PIGMENTED

Simplifies substrate preparation



### WATER-VAPOR PERMEABILITY

Allows the flow of water vapor without causing humidity damage or creating mold.



### ALLERGY-FREE

NON-TOXIC



### IMPACT RESISTANT

Hardwearing surface protecting walls against abrasion and scrapes.



### ENVIRONMENTALLY RESPONSIBLE

Reduce exposure to harmful particles



### CRACK RESISTANCE

Bridges existing cracks and prevent further cracking



### NON-HAZARDOUS TO HEALTH

Oeko-Tex certified



### EASY TO CLEAN

Resistant to disinfectants and cleaning agents



### A+ FOR ZERO EMISSIONS

For a better room climate



**HIGHLY COST-EFFECTIVE:** SIMPLIFIES PREPARATION OF WALL & CEILINGS SUBSTRATES, AND REINFORCES PAINT FINISHES. UP TO **300 SF/HOUR** APPLICATION PRODUCTIVITY, MINIMAL CLEAN-UP FOR DUST AND DEBRIS, IMPROVED PAINT YIELD.



Phantasy Diamond Dust 072



Phantasy Icecubes 077




Phantasy Waterfall EP08



Active Reno S38




Jute 004




Big Stripes 025



Dots 075



Structure 603




Structure 635




Structure 650



Silk 060



Fleece V22

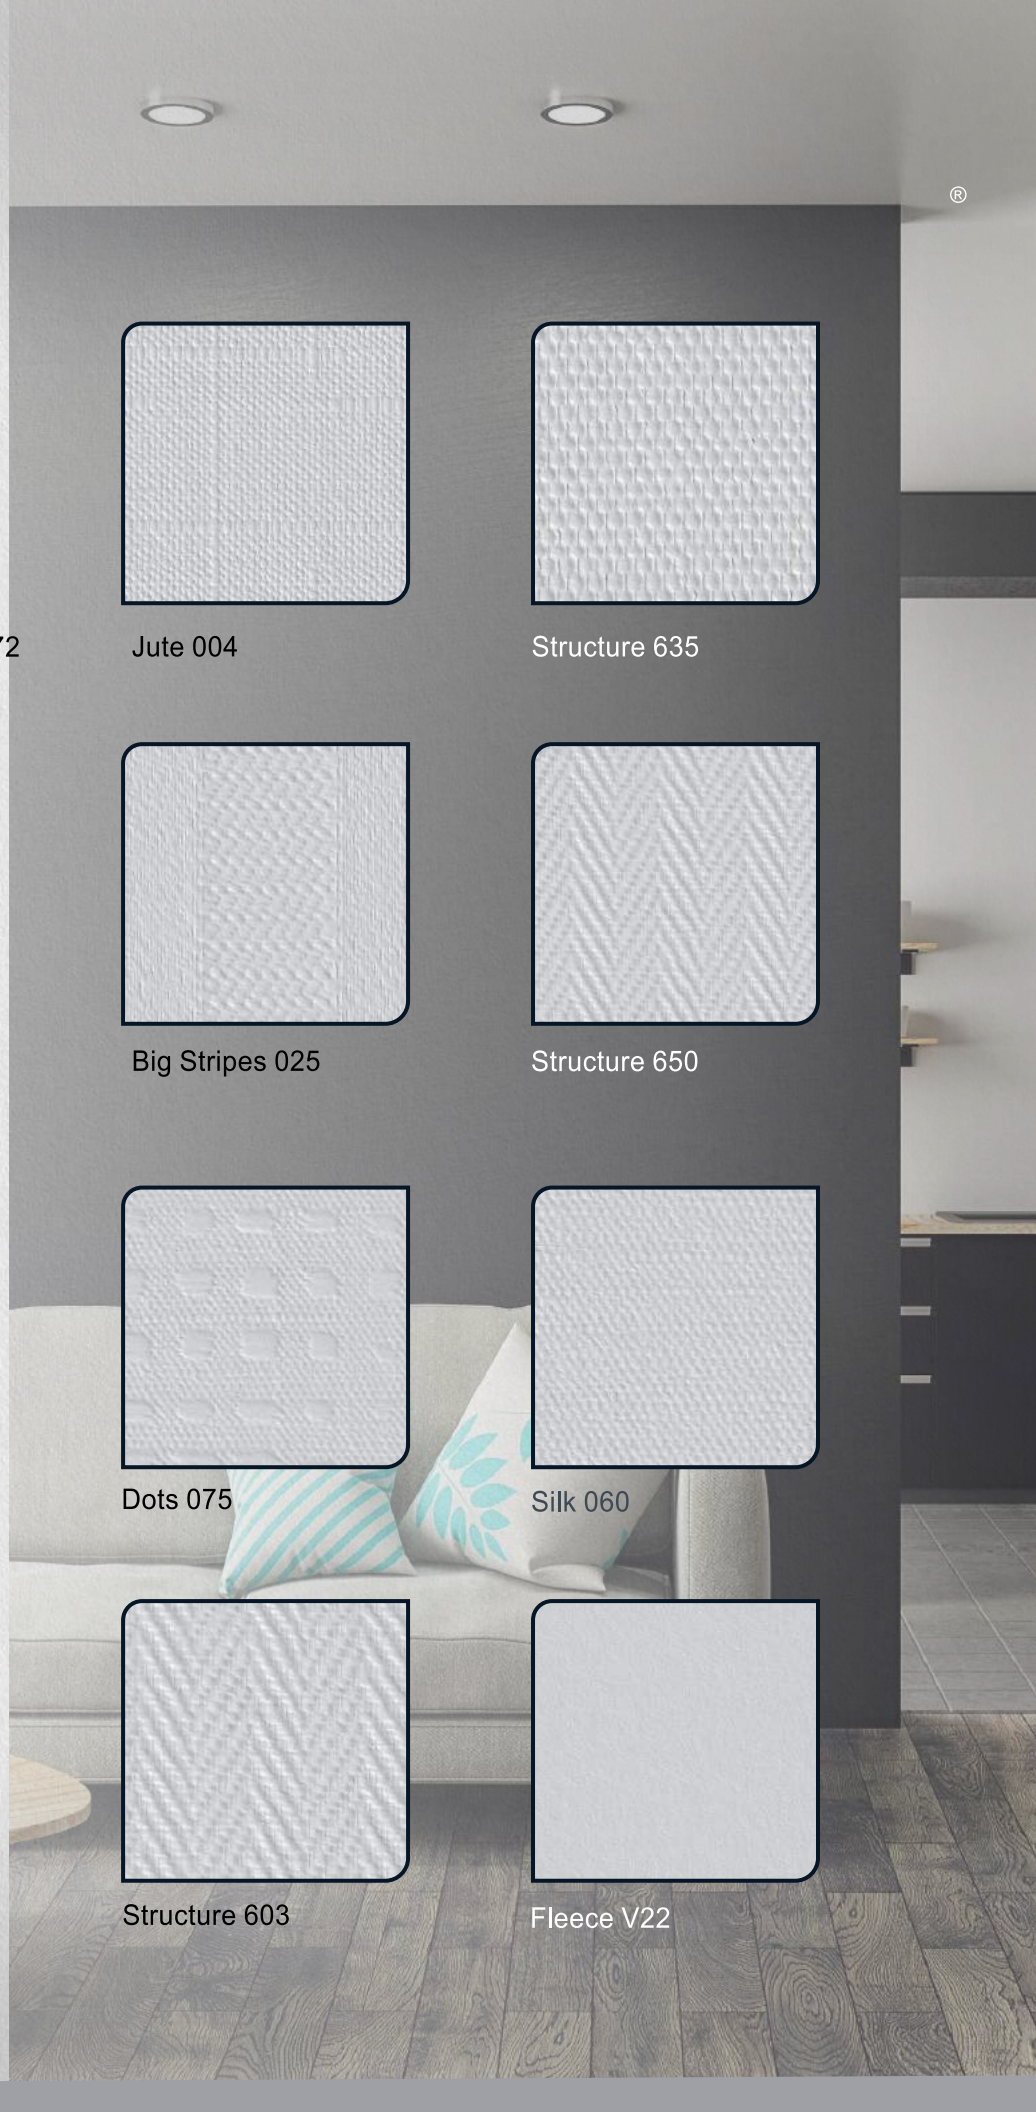



# AQUA TECHNOLOGY

## STEPS

- ▶ MINIMAL SURFACE PREPARATION.
- ▶ AN ADHESIVE MATERIAL IS BUILT ONTO THE FABRIC AND THEN ACTIVATED BY WATER TO INSTALL.
- ▶ 7HRS AVERAGE DRYING TIME.
- ▶ READY FOR PAINT.



## ✓ Certifications



Environmental product Declaration according to ISO 14025

SYSTEXX® Exclusively Distributed by Nordic Look®



Our branches

info@Nordic-Look.com ◀ www.Nordic-Look.com ◀